Twin

crevin

5 years guarantee • sanitized (antimicrobial)

General Information

Composition
76%PP 17%PES REC 4%OF 3%CO REC

Width
140 + 4cm

Weight
568 gr/m2 ± 5 %
795 gr/lm ± 5 %

Custom code
UE: 5407.83.00
USA: 5407.83.00.90

Laboratory test number
IN-00807-2018-B
2020AN1320 EN ISO 20743

Specifications

Seam slippage resistance (mm)
Warp: 1,90
Weft: 1,70
EN ISO 13936/2:2004

Abrasion resistance (End point)
35.000 EN ISO 12947-2:1998

Abrasion resistance
(change of aspect: 3000 cycles)
3-4 EN ISO 12947/4:1998
and EN 14465:2003 (Annex A)

Pilling resistance
4-5 EN ISO 12945/2:2000

Lightfastness
>6 EN ISO 105-B02:1998
and 105 B02/A01:2002

Colour fastness to rubbing
Dry: 4-5
Wet: 4-5
EN ISO 105-X12:2002

Care

PERFORMANCE+
Easy to clean, longlasting fabrics

Washing conditions

Soiling and cleanability
4-5 FORD FLTM BN 112-08:2005

Dimensional change domestic washing and drying (%)
Warp: -3
Weft: -1
EN ISO 3759:2008, EN ISO 6330:2000
and EN ISO 5077:2008

When confectioning or washing the sofa cover with velcro please attach a protective cloth.

Antibacterial activity
Strong antibacterial property
>3 EN ISO 20743:2013

Ignitability

BS5852 Source 0
EN1021-Part 1:2006
CAL TB 117:2013
NFPA 260:2013

Upon Request:
BS5852 Source 1
EN1021-Part 2:2006
BS 7176 Low Hazard
UNI 9175 Clase 3IM

Environmental considerations

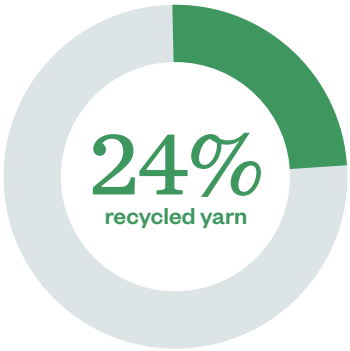

17% GRS recycled PET bottles
4% Circular yarn from own waste
3% Recycled CO
76% Low impact yarn (PP)

Life cycle analysis
Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.

Carbon footprint
3,6 kg CO_2 eq /m
12,62% less since 2020

Water consumption
69,9 liters/m
25,24% less since 2020

UNIVERSITAT POLITÈCNICA DE CATALUNYA
BARCELONATECH
Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa

Study realized in collaboration with UPC

Methodology:
Life Cycle Analysis. ISO 14040 standard.

Database:
Own data, Ecoinvent 3.6 database and published data.

Functional unit:
1 linear meters, 140 cm width.

Calculation methodology:
ReCiPe Midpoint (H) 2016 v1.0
ReCiPe Endpoint (H) 2016 v1.04
IPCC 2013 GWP 100a v1.03

Designed and Crafted in Terrassa (Barcelona)

Certificates

Rev. nº: 11 - 25/11/2022 *Results have been obtained by Crevin's internal laboratory and must therefore be seen as indicative.