
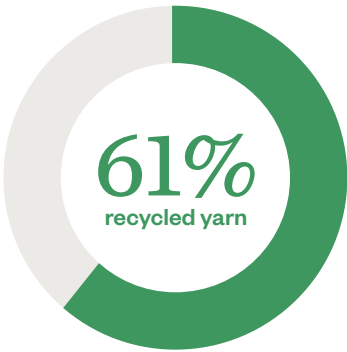



5 years guarantee

General Information	Specifications	Care		
 <p><b>Composition</b> 46%PET REC 39%PES 7%CO REC 6%OF REC 2%PES REC</p> <p><b>Width</b> 140 + 4cm</p> <p><b>Weight</b> 467 gr/m<sup>2</sup> ± 5 % 654 gr/lm ± 5 %</p> <p><b>Custom code</b> UE: 5801.36.00 USA: 5801.36.00.20</p> <p><b>Laboratory test number</b> 802.069 / 802.256 / 2024RA1611</p>	<p><b>Seam slippage resistance (mm)</b> Warp: <u>2.90</u> Weft: <u>3.00</u> EN ISO 13936/2:2004</p> <p><b>Abrasion resistance (End point)</b> 60.000 EN ISO 12947-2:1998</p> <p><b>Abrasion resistance (change of aspect: 3000 cycles)</b> <u>4</u> EN ISO 12947/4:1998 and EN 14465:2003 (Annex A)</p> <p><b>Pilling resistance</b> <u>5</u> EN ISO 12945/2:2000</p> <p><b>Lightfastness</b> <u>5-6</u> EN ISO 105-B02:1998 and 105 B02/A01:2002</p>	<p><b>PERFORMANCE+</b> Easy to clean, longlasting fabrics</p> <p><b>Washing conditions</b> </p> <p><b>Soiling and cleanability</b> 4-5 FORD FLTM BN 112-08:2005</p> <p><b>Dimensional change domestic washing and drying (%)</b> Warp: <u>-1</u> Weft: <u>-1</u> EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>When confectioning or washing the sofa cover with velcro please attach a protective cloth.</p> <p><b>Ignitability</b></p> <table border="0"> <tr> <td>BS5852 Source 0 EN1021-Part 1:2006 CAL TB 117:2013 NFPA 260:2013</td> <td>Upon Request: BS5852 Source 1 EN1021-Part 2:2006 BS 7176 Low Hazard UNI 9175 Clase 3IM</td> </tr> </table>	BS5852 Source 0 EN1021-Part 1:2006 CAL TB 117:2013 NFPA 260:2013	Upon Request: BS5852 Source 1 EN1021-Part 2:2006 BS 7176 Low Hazard UNI 9175 Clase 3IM
BS5852 Source 0 EN1021-Part 1:2006 CAL TB 117:2013 NFPA 260:2013	Upon Request: BS5852 Source 1 EN1021-Part 2:2006 BS 7176 Low Hazard UNI 9175 Clase 3IM			

## Environmental considerations

 <p><b>61%</b> recycled yarn</p> <p>46% GRS recycled PET bottles 7% Recycled CO 6% Circular yarn from own waste 2% GRS recycled PES 39% PES</p>	<p><b>Life cycle analysis</b> Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.</p> <p><b>Carbon footprint</b> <b>4,78</b> kg CO<sub>2</sub> eq/m <u>6,09% less since 2020</u></p> <p><b>Water consumption</b> <b>109,44</b> liters/m <u>17,70% less since 2020</u></p>	 <p><b>UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH</b> Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Calculation methodology: ReCiPe Midpoint (H) 2016 v1.0 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03</p>
--	---	---

Designed and Crafted in Terrassa (Barcelona)

## Certificates

