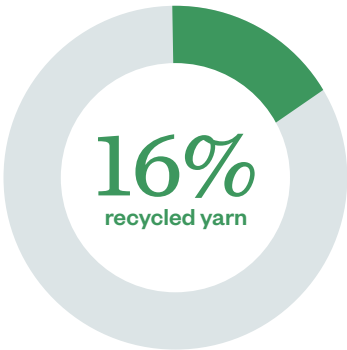


outdoor • easy stain release • bleach cleanable

General Information	Specifications	Care
 Composition 84%PP 16%PES REC Width 140 + 4cm Weight 530 gr/m² ± 5 % 742 gr/lm ± 5 % Custom code UE: 5407.73.00 USA: 5407.73.20.60 Laboratory test number 2019AN1636	Seam slippage resistance (mm) Warp: 2,00 Weft: 2,60 EN ISO 13936/2:2004 Abrasion resistance (End point) 30.000 EN ISO 12947-2:2016 Pilling resistance 4-5 EN ISO 12945/2:2000 Lightfastness to weather ≥6 EN ISO 105-B04:1997 (1000 hours) Colour fastness to rubbing Wet: 4-5 Dry: 4-5 EN ISO 105-X12:2002 Colour fastness to domestic and commercial laundering (30°) 4-5 EN ISO 105-C06:1997/AC:2009 Resistance to putrefaction (Mould & bacterium) Face fabric EN 20811:1992 - AATCC 30:2004 Swimming pool chlorine fastness 4-5 EN ISO 105-E03:1993 Sea water fastness 4-5 EN ISO 105-E02:1996 Urine fastness 4-5 EN ISO 105-E01:1996	Washing conditions  Soiling and cleanability 4-5 FORD FLTM BN 112-08:2005 Dimensional change domestic washing and drying (%) Warp: -2 Weft: -0,8 EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008 Bleach cleanable 80% water 20% bleach. In case of mould growth, machine-wash with a mild laundry detergent and add 0,2 liter of household bleach to the first rinse cycle. Wash at 40° C during at least 30 minutes. Use gentle cycle with minimal centrifugation. When confectioning or washing the sofa cover with velcro please attach a protective cloth. Ignitability BS5852 Source O EN1021-Part 1:2006 CAL TB 117:2013 NFPA 260:2013

Environmental considerations

 16% recycled yarn 16% GRS recycled PET bottles 84% Low impact yarn (PP)	Life cycle analysis Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling. Carbon footprint 3,45 kg CO₂ eq / m 10,39% less since 2020 Water consumption 49 liters / m 9,94% less since 2020	 UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa Study realized in collaboration with UPC Methodology: Life Cycle Analysis. ISO 14040 standard. Functional unit: 1 linear meters, 140 cm width. Database: Own data, Ecoinvent 3.6 database and published data. Calculation methodology: Aware V1.02 ReCiPe Midpoint (H) 2016 v1.04 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03 Software: SimaPro 9.4.0.1
--	---	--

Designed and Crafted
in Terrassa (Barcelona)