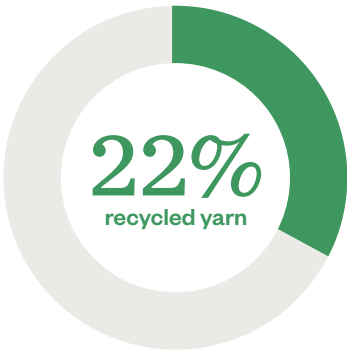


stretch • easy stain release

General Information		Specifications	Care
 Composition 78%PES 22%PES REC Width 140 + 4cm Weight 432 gr/m2 ± 5 % 606 gr/lm ± 5 % Custom code UE: 6005.38.00 USA: 6005.38.00 Laboratory test number IN-01743-2023-1		Seam slippage resistance (mm) Warp: 2 Weft: 3 EN ISO 13936/2:2004 Abrasion resistance (End point) 50.000 EN ISO 12947-2:2016 Abrasion resistance (change of aspect: 3000 cycles) 3 EN ISO 12947/4:1998 y EN 14465:2003 (Annex A) Pilling resistance 3-4 EN ISO 12945/2:2000 Lightfastness 5-6 EN ISO 105-B02:1998 and EN ISO 105 B02/A01:2002 Colour fastness to rubbing Dry: 4-5 Wet: 4-5 EN ISO 105-X12:2002 Bursting Strenght 783,3 EN ISO 13938-2:2019 Notes: Slight colour variations may occur from batch to batch.	Washing conditions  Soiling and cleanability 4 FORD FLTM BN 112-08:2005 Dimensional change domestic washing and drying (%) Warp: -3 Weft: 0 EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008 When confectioning or washing the sofa cover with velcro please attach a protective cloth.
			Ignitability BS5852 Source O EN1021-Part 1 CAL TB 117 NFPA 260
Environmental considerations			
 22% recycled yarn 22% GRS recycled PET bottles 78% PES		UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa Study realized in collaboration with UPC Methodology: Life Cycle Analysis. ISO 14040 standard. Functional unit: 1 linear meters, 140 cm width. Database: Own data, Ecoinvent 3.6 database and published data. Calculation methodology: Aware V1.02 ReCiPe Midpoint (H) 2016 v1.04 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03 Software: SimaPro 9.4.0.1 Life cycle analysis Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling. Carbon footprint 4,32 kg CO₂ eq /m Water consumption 79,8 liters/m	
Designed and Crafted in Terrassa (Barcelona)			