
Bora Bora (Imp)

crevin

outdoor • fire resistant • waterproof • easy stain release • bleach cleanable

General Information

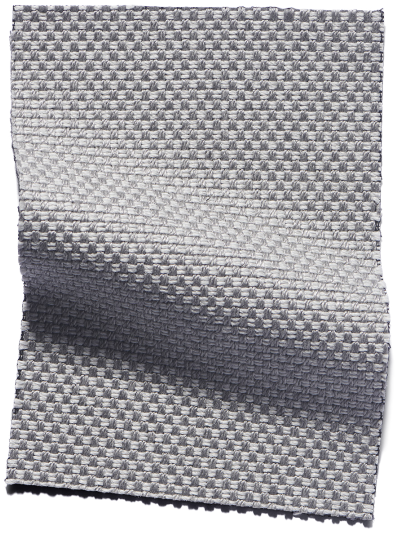

Composition
80%PP 18%PES REC 2%PU

Width
140 + 4cm

Weight
764 gr/m2 ± 5 %
1070 gr/lm ± 5 %

Custom code
UE: 5903.20.90
USA: 5903.20.18.00

Laboratory test number
IN-00261-2017

Specifications

Seam slippage resistance (mm)
Warp: 2,00 / Weft: 3,00
EN ISO 13936/2:2004

Abrasion resistance (End point)
>100.000 EN ISO 12947-2:2016

Pilling resistance
5 EN ISO 12945/2:2000

Lightfastness to weather
>6 EN ISO 105-B04:1997 (1000 hours)

Colour fastness to rubbing
Wet: 4-5 / Dry: 4-5
EN ISO 105-X12:2002

Colour fastness to domestic and comercial laundering (30º)
4-5 EN ISO 105-C06:1997/AC:2009

Resistance to water penetration
>2000mbar

Resistance to putrefaction (Mould & bacterium resist.)
Yes EN 20811:1992 - AATCC 30:2004

Swimming pool chlorine fastness
4-5 EN ISO 105-E03:1993

Sea water fastness
4-5 EN ISO 105-E02:1996

Care

Washing conditions



Dimensional change domestic washing and drying (%)
Warp: -3
Weft: -1
EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008

Bleach cleanable 80% water 20% bleach. In case of mould growth, machine-wash with a mild laundry detergent and add 0,2 liter of household bleach to the first rinse cycle. Wash at 40°C during at least 30 minutes. Use gentle cycle with minimal centrifugation.

When confectioning or washing the sofa cover with velcro please attach a protective cloth.


Notes:
Recomendation: Distance overlock and stitch: 12 mm + 0,5 mm minimum
Needle thickness: 110 Nm
Thread: Polyester - Cotton 74 Tex (nº36)
Stitch density: 4.0 stitches+0,1 stitches/cm

Ignitability

BS5852 Source 0
EN1021-Part 1:2006
CAL TB 117:2013
NFPA 260:2013
BS5852 Source 1
EN1021-Part 2:2006
IMO Anexo 1 Parte 8

Upon Request:
BS 7176 Low Hazard
UNI 9175 Clase 3IM

Environmental considerations

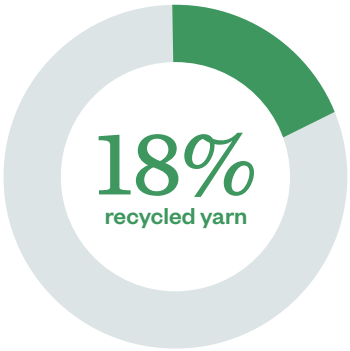

18% GRS recycled PET bottles
82% Low impact yarn (PP)

Life cycle analysis
Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.

Carbon footprint
4,72 kg CO_2 eq/m
11,78% less since 2020

Water consumption
67,24 liters/m
11,22% less since 2020

UNIVERSITAT POLITÈCNICA DE CATALUNYA
BARCELONATECH
Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa

Study realized in collaboration with UPC

Methodology:
Life Cycle Analysis. ISO 14040 standard.

Functional unit:
1 linear meters, 140 cm width.

Database:
Own data, Ecoinvent 3.6 database and published data.

Calculation methodology:
Aware V1.02
ReCiPe Midpoint (H) 2016 v1.04
ReCiPe Endpoint (H) 2016 v1.04
IPCC 2013 GWP 100a v1.03
Software: SimaPro 9.4.0.1

Designed and Crafted in Terrassa (Barcelona)

Rev. nº: 14 - 24/08/2022 *Results that are underlined have been obtained by Crevin's internal laboratory and must therefore be seen as indicative.