Hatch

crevin

5 years guarantee • easy to clean • durability

General Information



Composition
77%PP 23%PES REC

Width
140 + 4cm

Weight
586 gr/m2 ± 5 %
820 gr/lm ± 5 %

Custom code
UE: 5407.73.00
USA: 5407.73.20.60

Laboratory test number
4858-004T_1_EN
4858-003T_1A_EN

Specifications

Seam slippage resistance (mm)
Warp: 2,10
Weft: 1,20
EN ISO 13936/2:2004

Abrasion resistance (End point)
26.667 EN ISO 12947-2:2016

Pilling resistance
4 EN ISO 12945/2:2000

Lightfastness
>6 EN ISO 105-B02:1998
and 105 B02/A01:2002

Colour fastness to rubbing
Dry: 4-5
Wet: 4-5
EN ISO 105-X12:2002

Care

PERFORMANCE+
Easy to clean, longlasting fabrics

Washing conditions

Soiling and cleanability
4-5 FORD FLTM BN 112-08:2005


When confectioning or washing the sofa cover with velcro please attach a protective cloth.

Ignitability

BS5852 Source 0
EN1021-Part 1:2006
CAL TB 117:2013
NFPA 260:2013

Upon Request:
BS5852 Source 1
EN1021-Part 2:2006
BS 7176 Low Hazard
UNI 9175 Clase 3IM

Environmental considerations

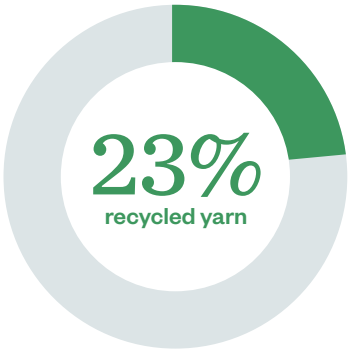

23% GRS recycled PET bottles
77% Low impact yarn (PP)

Life cycle analysis
Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.

Carbon footprint
3,83 kg CO_2 eq/m
-

Water consumption
78,69 liters/m
-

UNIVERSITAT POLITÈCNICA DE CATALUNYA
BARCELONATECH
Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa

Study realized in collaboration with UPC

Methodology:
Life Cycle Analysis. ISO 14040 standard.

Functional unit:
1 linear meters, 140 cm width.

Database:
Own data, Ecoinvent 3.6 database and published data.

Calculation methodology:
Aware V1.02
ReCiPe Midpoint (H) 2016 v1.04
ReCiPe Endpoint (H) 2016 v1.04
IPCC 2013 GWP 100a v1.03
Software: SimaPro 9.4.0.1

Designed and Crafted in Terrassa (Barcelona)

Rev. nº: 3 - 16/05/2023 *Results that are underlined have been obtained by Crevin's internal laboratory and must therefore be seen as indicative.