Velvety

crevin

5 years guarantee • easy to clean • durability • pet-friendly

General Information



Composition
80%PES 11%PES REC 5%CO REC 4%CO

Width
140 + 4cm

Weight
557 gr/m2 ± 5 %
780 gr/lm ± 5 %

Custom code
UE: 5801.36.00
USA: 5801.36.00.20

Laboratory test number
Docs. 13868, 13865, 13884, 13883
2020AN1320 EN ISO 20743
IN-01968/2023-1

Specifications

Seam slippage resistance (mm)
Warp: 1,00 / Weft: 1,00
EN ISO 13936/2:2004

Abrasion resistance (End point)
200.000 EN ISO 12947-2:2016

Abrasion resistance (change of aspect: 3000 cycles)
4-5 EN ISO 12947/4:1998
and EN 14465:2003 (Annex A)

Pilling resistance
5 EN ISO 12945/2:2000

Lightfastness
5-6 EN ISO 105-B02:1998
and 105 B02/A01:2002

Colour fastness to rubbing
Dry: 4-5 / Wet: 4-5
EN ISO 105-X12:2002

Snagging resistance*
4-5 ASTM D 3939:13(2017)

* In a snagging test, a fabric sample is placed on a cylindrical drum and a spiked ball bounces randomly against the rotating fabric. After 600 cycles the degree of damage is graded on a scale of 1 to 5. A 4-5 grading stands for very high snag resistance. In practice, this means that no snags or threading are likely to occur, although prolonged and intense animal impact may provoke superficial pilling, which can be easily removed by simple brushing.

Caution: Scratching is natural feline behaviour. A 4-5 grading does not mean a fabric is immune to the impact of animal claws. To protect upholstered furniture from prolonged and severe scratching, especially from cats, alternative scratching posts or protective pads are recommended. Destructive scratching due to extreme feline behaviour is no ground for claims.

Care

PERFORMANCE+
Easy to clean, longlasting fabrics

Washing conditions

Soiling and cleanability
4-5 FORD FLTM BN 112-08:2005

Dimensional change domestic washing and drying (%)
Warp: -1,6
Weft: -2
EN ISO 3759:2008, EN ISO 6330:2000
and EN ISO 5077:2008


Iron on reverse side.
When confectioning or washing the sofa cover with velcro please attach a protective cloth.

Ignitability

BS5852 Source 0
EN1021-Part 1:2006
CAL TB 117:2013
NFPA 260:2013

Upon Request:
BS5852 Source 1
EN1021-Part 2:2006
BS 7176 Low Hazard
UNI 9175 Clase 3IM

Environmental considerations

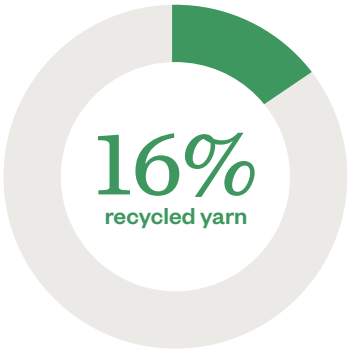

11% GRS recycled PET bottles
5% Recycled CO
80% PES
4% CO

Life cycle analysis
Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.

Carbon footprint
5,6 kg CO_2 eq/m
-1,63% less since 2020

Water consumption
154,4 liters/m
9,55% less since 2020

UNIVERSITAT POLITÈCNICA DE CATALUNYA
BARCELONATECH
Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa

Study realized in collaboration with UPC

Methodology:
Life Cycle Analysis. ISO 14040 standard.

Functional unit:
1 linear meters, 140 cm width.

Database:
Own data, Ecoinvent 3.6 database and published data.

Calculation methodology:
Aware V1.02
ReCiPe Midpoint (H) 2016 v1.04
ReCiPe Endpoint (H) 2016 v1.04
IPCC 2013 GWP 100a v1.03
Software: SimaPro 9.4.0.1

Designed and Crafted in Terrassa (Barcelona)

Rev. nº: 17 - 23/09/2022 *Results that are underlined have been obtained by Crevin's internal laboratory and must therefore be seen as indicative.