

5 years guarantee • easy to clean • durability

General Information



Composition
58%PES REC 34%PES 4%CO REC
4%OF REC

Width
140 + 4cm

Weight
618 gr/m2 ± 5 %
865 gr/lm ± 5 %

Custom code
UE: 5801.36.00
USA: 5801.36.00.20

Laboratory test number
IN-00711-2024-1

Specifications

Seam slippage resistance (mm)
Warp: 1,8
Weft: 1,2
EN ISO 13936/2:2004

Abrasion resistance (Full worn off)
90.000 EN ISO 12947-2:2016

Pilling resistance
4-5 EN ISO 12945/2:2000

Lightfastness
5-6 EN ISO 105-B02:1998
and 105 B02/A01:2002

Colour fastness to rubbing
Dry: 4-5
Wet: 4-5
EN ISO 105-X12:2002

Care

PERFORMANCE+
Easy to clean, longlasting fabrics

Washing conditions

Soiling and cleanability
4-5 FORD FLTM BN 112-08:2005


Dimensional change domestic washing and drying (%)
Warp: -3
Weft: -2
EN ISO 3759:2008, EN ISO 6330:2000
and EN ISO 5077:2008

When confectioning or washing the sofa cover with veloro please attach a protective cloth.

Ignitability

BS5852 Source 0 EN1021-Part 1:2006 CAL TB 117:2013 NFPA 260:2013	Upon Request: BS5852 Source 1 EN1021-Part 2:2006 BS 7176 Low Hazard UNI 9175 Clase 3IM
---	--

Environmental considerations

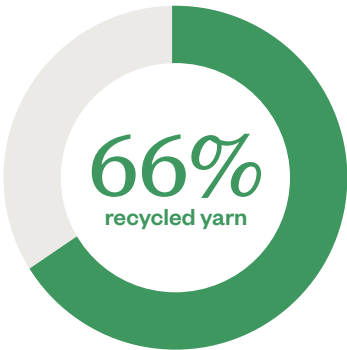

58% GRS recycled PET bottles
4% Recycled CO
4% Circular yarn from own waste
34% PES

Life cycle analysis
Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.

Carbon footprint
5,23 kg CO₂ eq/m

Water consumption
110,07 liters/m

UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH
Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa

Study realized in collaboration with UPC

Methodology:
Life Cycle Analysis. ISO 14040 standard.

Functional unit:
1 linear meters, 140 cm width.

Database:
Own data, Ecoinvent 3.6 database and published data.

Calculation methodology:
Aware V1.02
ReCiPe Midpoint (H) 2016 v1.04
ReCiPe Endpoint (H) 2016 v1.04
IPCC 2013 GWP 100a v1.03
Software: SimaPro 9.4.0.1

Designed and Crafted
in Terrassa (Barcelona)

