

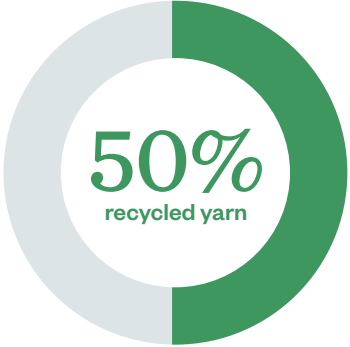



5 years guarantee • bleach cleanable

General Information	Specifications	Care										
 <p>Composition 50%PP 32%PES REC 12%CO REC 6%OF REC</p> <p>Width 140 + 4cm</p> <p>Weight 440 gr/m² ± 5 % / 616 gr/lm ± 5 %</p> <p>Custom code UE: 5407.83.00 / USA: 5407.83.00.90</p> <p>Laboratory test number Docs. 11835, 11836, 11850 Hohenstein 15.8.5.0335 Hohenstein 15.8.5.0343 2020AN1320 EN ISO 20743</p>	<p>Seam slippage resistance (mm) Warp: <u>1,60</u> Weft: <u>1,00</u> EN ISO 13936/2:2004</p> <p>Abrasion resistance (End point) 66.000 EN ISO 12947-2:2016</p> <p>Abrasion resistance (change of aspect: 3000 cycles) 4-5 EN ISO 12947/4:1998 and EN 14465:2003 (Annex A)</p> <p>Pilling resistance 4-5 EN ISO 12945/2:2000</p> <p>Lightfastness <u>6-7</u> EN ISO 105-B02:1998 and 105 B02/A01:2002</p> <p>Colour fastness to rubbing Dry: <u>4-5</u> Wet: <u>4-5</u> EN ISO 105-X12:2002</p> <p>Notes: Bleach cleanable 80% water 20% bleach. Recommended for people with allergies.</p>	<p>Care</p> <p>PERFORMANCE+ Easy to clean, longlasting fabrics</p> <p>Washing conditions </p> <p>Soiling and cleanability <u>4-5</u> FORD FLTM BN 112-08:2005</p> <p>Dimensional change domestic washing and drying (%) Warp: <u>-1</u> Weft: <u>-1</u> EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008</p> <p>When confectioning or washing the sofa cover with velcro please attach a protective cloth.</p> <hr/> <p>Ignitability</p> <table border="0"> <tr> <td>BS5852 Source 0</td> <td>Upon Request:</td> </tr> <tr> <td>EN1021-Part 1:2006</td> <td>BS5852 Source 1</td> </tr> <tr> <td>CAL TB 117:2013</td> <td>EN1021-Part 2:2006</td> </tr> <tr> <td>NFPA 260:2013</td> <td>BS 7176 Low Hazard</td> </tr> <tr> <td></td> <td>UNI 9175 Clase 3IM</td> </tr> </table>	BS5852 Source 0	Upon Request:	EN1021-Part 1:2006	BS5852 Source 1	CAL TB 117:2013	EN1021-Part 2:2006	NFPA 260:2013	BS 7176 Low Hazard		UNI 9175 Clase 3IM
BS5852 Source 0	Upon Request:											
EN1021-Part 1:2006	BS5852 Source 1											
CAL TB 117:2013	EN1021-Part 2:2006											
NFPA 260:2013	BS 7176 Low Hazard											
	UNI 9175 Clase 3IM											

Environmental considerations

 <p>50% recycled yarn</p> <p>32% GRS recycled PET bottles 12% Recycled CO 6% Circular yarn from own waste 50% Low impact yarn (PP)</p>	<p>Life cycle analysis Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling.</p> <p>Carbon footprint 2,5 kg CO₂ eq / m <u>22,60% less since 2020</u></p> <p>Water consumption 73,61 liters / m <u>37,01% less since 2020</u></p>	<p> UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa</p> <p>Study realized in collaboration with UPC</p> <p>Methodology: Life Cycle Analysis. ISO 14040 standard.</p> <p>Functional unit: 1 linear meters, 140 cm width.</p> <p>Database: Own data, Ecoinvent 3.6 database and published data.</p> <p>Calculation methodology: Aware V1.02 ReCiPe Midpoint (H) 2016 v1.04 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03 Software: SimaPro 9.4.01</p>
--	--	---

Designed and Crafted
in Terrassa (Barcelona)

