
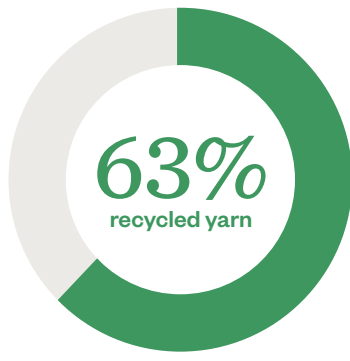


5 years guarantee • easy to clean • durability

General Information	Specifications	Care
 Composition 50%PES REC 37%PES 7%CO REC 6%OF REC Width 140 + 4cm Weight 470 gr/m2 ± 5 % 658 gr/lm ± 5 % Custom code UE: 5801.36.00 USA: 5801.36.00.20 Laboratory test number IN-01060-2024-1	Seam slippage resistance (mm) Warp: 1,7 Weft: 1,5 EN ISO 13936/2:2004 Abrasion resistance (Fully worn off) 70.000 EN ISO 12947-2:2016 Pilling resistance 4-5 EN ISO 12945/2:2000 Lightfastness <u>5-6</u> EN ISO 105-B02:1998 and 105 B02/A01:2002	PERFORMANCE+ Easy to clean, longlasting fabrics Washing conditions  Soiling and cleanability 4-5 FORD FLTM BN 112-08:2005 Dimensional change domestic washing and drying (%) Warp: -3% Weft: -3% EN ISO 3759:2008, EN ISO 6330:2000 and EN ISO 5077:2008 When confectioning or washing the sofa cover with veloro please attach a protective cloth.
Environmental considerations		Ignitability
 63% recycled yarn 50% GRS recycled PET bottles 7% Recycled CO 6% Circular yarn from own waste 37% PES	Life cycle analysis Cradle to gate assessment. From raw material extraction to finished fabric: resources, yarn production and dyeing, fabric weaving and finishing, waste recycling. Carbon footprint 3,86 kg CO₂ eq /m Water consumption 95,96 liters/m	UNIVERSITAT POLITÈCNICA DE CATALUNYA BARCELONATECH Escola Superior d'Enginyeries Industrial, Aeroespacial i Audiovisual de Terrassa Study realized in collaboration with UPC Methodology: Life Cycle Analysis. ISO 14040 standard. Functional unit: 1 linear meters, 140 cm width. Database: Own data, Ecoinvent 3.6 database and published data. Calculation methodology: Aware V1.02 ReCiPe Midpoint (H) 2016 v1.04 ReCiPe Endpoint (H) 2016 v1.04 IPCC 2013 GWP 100a v1.03 Software: SimaPro 9.4.0.1
Designed and Crafted in Terrassa (Barcelona)		